

FRM-E-3RU

045-918-10



Product Description

Multilinks Economy Rack Mounts were designed with simplicity in mind. They are engineered to meet industry standards, making them compatible with many of the leading rack manufacturers. The FRM-E-3RU has a 9 termination panel capacity and slide out master panel tray. Quickly configure your own with the ordering guide or at GoMultilink.com

Features & Benefits

- Universal mounting brackets for 19" or 23" Racks
- Plexiglas front for quick convenient visibility
- Slide out tray for an improved working environment
- Removable top on the front and rear of the rack mount for easy access
- Compatible with Multilink's Fiber Termination Modules (FTM)
- Comes with a port designation card
- Improved fiber management

© Multilink Inc. 2019 • All Rights Reserved

Copyright © 2019 Multilink Inc. • All rights reserved • Specifications subject to change without notice • Rev. December 16, 2019

Multilink
Innovation At Work




YouTube
[youtube.com/gomultilink](https://www.youtube.com/gomultilink)

Specifications





Parameter	Specification
Dimensions:	17.0"W x 5.21"H x 14.51"D
Material:	16 Gauge Steel
Finish:	Polyester Powder Coat
Color:	Black
Rack Compatibility:	19" Rack, 23" Rack
Adapter Panel Capacity:	9
Splice Tray:	2000-SSTA
Splice Tray Capacity:	5
Splice Capacity/Tray:	24
Cable Entries & Exits:	8

Accessories

Splice Tray




Products	Description	Stock ID
	2000-SSTA	70506K

Loaded Adapter Panel

Products	Description	Stock ID
	SM Simplex SC/UPC	10-4810
	SM Duplex SC/UPC	10-1817
	SM Simplex SC/APC	10-4442
	SM Duplex SC/APC	10-5327


Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 440 366 6966
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Fax: +1 440 366 6802
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: lasupport@gomultilink.com


	MM Quad LC/PC	065-246-10
	SM Quad LC/UPC	065-420-10
	SM Quad LC/APC	065-244-10

*More options available at GoMultilink.com

Strain Relief

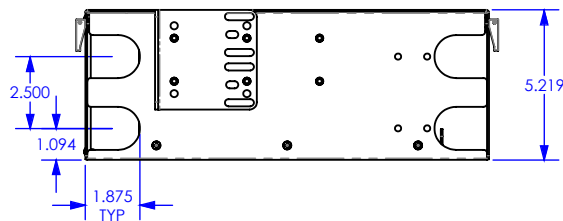
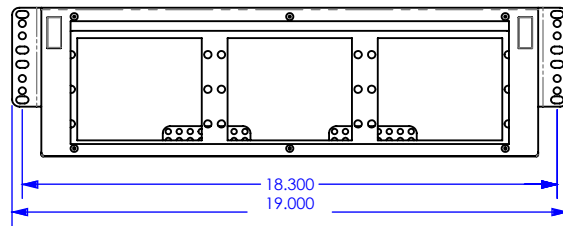
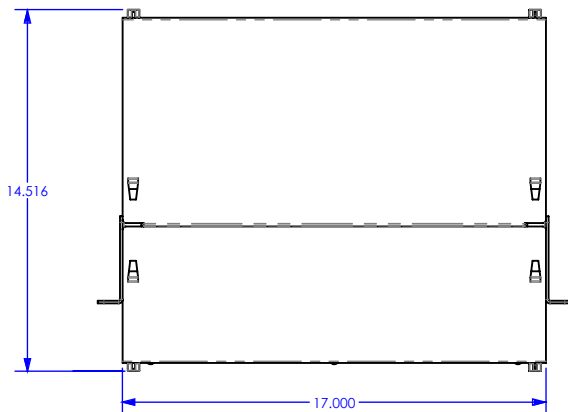
Products	Description	Stock ID
	Large Strain Relief Kit	065-151-10

Security

Products	Description	Stock ID
	Lock & Key	99534

Dimensional Drawings

045-918-10



Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 440 366 6966
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Fax: +1 440 366 6802
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: lasupport@gomultilink.com

Ordering Guide

ML	70						X2		24
	1	2	3	4	5	6	7	8	9

1	Rack Mount
70	FRM-E-3RU

2	# of Conn.
006	6
012	12
018	18
024	24
030	30
036	36
042	42
048	48
054	54
060	60
072	72
096	96
108	108
120	120
144	144
168	168
192	192
216	216

3	Color
B	Black
O	Off White

4	Adapter
SCS	SC Simplex MM
SCD	SC Duplex MM
SUS	SC Simplex SM
SUD	SC Duplex SM
SAS	SC/APC Simplex SM
SAD	SC/APC Simplex MM
SGS	SC Simplex 10 Gig
SGD	SC Duplex 10 Gig
FC	FC MM
FU	FC SM
LCAD	LC/APC Duplex SM
LCAQ	LC/APC Quad SM
LCPD	LC Duplex MM
LCPQ	LC Quad MM
LCUD	LC Duplex SM
LCUQ	LC Quad SM
LCGD	LC Duplex 10 Gig
LCGQ	LC Quad 10 Gig
SM6	ST 6 Port SM
SM12	ST 12 Port SM
ST6	ST 6 Port MM
ST12	ST 12 Port MM

5	Pigtail
00	NONE
T9	900µm (Spiral Wrap)
T3	3mm
MD	Module
OSP	OSP Dielectric Cable
OSA	OSP Armored Cable
RBN	Ribbon
DST	Distribution Cable

6	Length (Meters)
00X	Custom

7	Splice Tray
X2	2000-SSTA

8	Tray Count
1	1
2	2
3	3
4	4
5	5

9	Splice Count
24	24

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: lasupport@gomultilink.com

Ordering Guide

1	2	3	4	5	6	7

1	Splitter
MLS	Small Form
MLC	Cassette
MLL	LGX
MLR	Rack

2	# of Splits
102	1 x 2
104	1 x 4
108	1 x 8
116	1 x 16
132	1 x 32
208	2 x 08
216	2 x 16
232	2 x 32

3	Input Connector
SA	SC/APC
SU	SC/UPC
LA	LC/APC
LU	LC/UPC
ST	ST/UPC
FC	FC/UPC
XX	None

4	Output Connector
SA	SC/APC
SU	SC/UPC
LA	LC/APC
LU	LC/UPC
ST	ST/UPC
FC	FC/UPC
XX	None



Multilink Inc.
 580 Ternes Ln
 Elyria, OH 44035
 Tel: (440) 366-6966
 Fax: (440) 366-6802



facebook.com/GoMultilink1



twitter.com/GoMultilink



youtube.com/GoMultilink

© Multilink Inc. 2019 • All Rights Reserved

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: lasupport@gomultilink.com