

# FRM-E-4RU

045-919-10



## Product Description

Multilinks Economy Rack Mounts were designed with simplicity in mind. They are engineered to meet industry standards, making them compatible with many of the leading rack manufacturers. The FRM-E-4RU has a 12 termination panel capacity and slide out master panel tray. Quickly configure your own with the ordering guide or at [GoMultilink.com](http://GoMultilink.com)

## Features & Benefits


- Universal mounting brackets for 19" or 23" Racks
- Plexiglas front for quick convenient visibility
- Slide out tray for an improved working environment
- Removable top on the front and rear of the rack mount for easy access
- Compatible with Multilink's Fiber Termination Modules (FTM)
- Comes with a port designation card
- Improved fiber management

## Specifications





Parameter	Specification
Dimensions:	17.0"W x 6.96"H x 14.5"D
Material:	16 Gauge Steel
Finish:	Polyester Powder Coat
Color:	Black
Rack Compatibility:	19" Rack, 23" Rack
Adapter Panel Capacity:	12
Splice Tray:	2000-SSTA
Splice Tray Capacity:	6
Splice Capacity/Tray:	24
Cable Entries & Exits:	8

## Accessories

### Splice Tray

Products	Description	Stock ID
	2000-SSTA	70506K




### Loaded Adapter Panel

Products	Description	Stock ID
	SM Simplex SC/UPC	10-4810
	SM Duplex SC/UPC	10-1817
	SM Simplex SC/APC	10-4442
	SM Duplex SC/APC	10-5327

## Contact Us


North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 440 366 6966
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Fax: +1 440 366 6802
Email: <a href="mailto:engsupport@gomultilink.com">engsupport@gomultilink.com</a>	Email: <a href="mailto:engsupport@gomultilink.com">engsupport@gomultilink.com</a>	Email: <a href="mailto:lasupport@gomultilink.com">lasupport@gomultilink.com</a>

## Loaded Adapter Panel


Products	Description	Stock ID
	MM Quad LC/PC	065-246-10
	SM Quad LC/UPC	065-420-10
	SM Quad LC/APC	065-244-10

\*More options available at [GoMultilink.com](http://GoMultilink.com)

## Strain Relief




Products	Description	Stock ID
	Large Strain Relief Kit	065-151-10

## Security

Products	Description	Stock ID
	Lock & Key	99534

## Dimensional Drawings

**045-919-10**

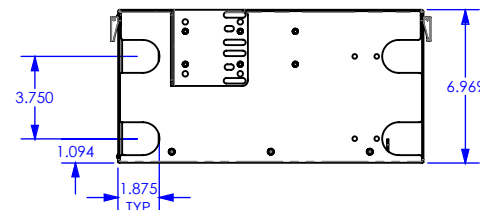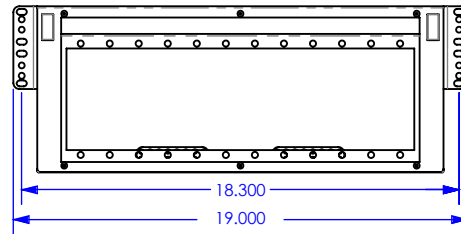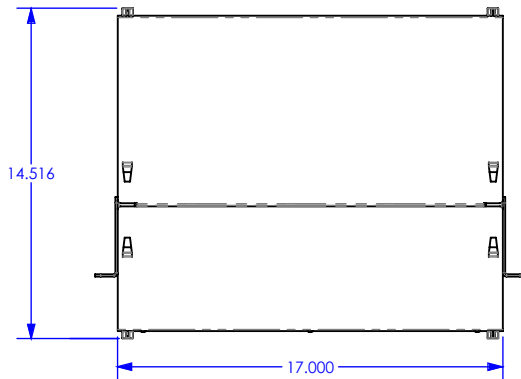

### Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 440 366 6966
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Fax: +1 440 366 6802
Email: <a href="mailto:engsupport@gomultilink.com">engsupport@gomultilink.com</a>	Email: <a href="mailto:engsupport@gomultilink.com">engsupport@gomultilink.com</a>	Email: <a href="mailto:lasupport@gomultilink.com">lasupport@gomultilink.com</a>

## Ordering Guide

ML	71					003		2	24
	1	2	3	4	5	6	7	8	9

1	Rack Mount
71	FRM-E-4RU

2	# of Conn.
006	6
012	12
018	18
024	24
030	30
036	36
042	42
048	48
054	54
060	60
066	66
072	72
096	96
108	108
120	120
132	132
144	144

3	Color
B	Black
O	Off White

4	Adapter
SCS	SC Simplex MM
SCD	SC Duplex MM
SUS	SC Simplex SM
SUD	SC Duplex SM
SAS	SC/APC Simplex SM
SAD	SC/APC Simplex MM
SGS	SC Simplex 10 Gig
SGD	SC Duplex 10 Gig
FC	FC MM
FU	FC SM
LCAD	LC/APC Duplex SM
LCAQ	LC/APC Quad SM
LCPD	LC Duplex MM
LCPQ	LC Quad MM
LCUD	LC Duplex SM
LCUQ	LC Quad SM
LCGD	LC Duplex 10 Gig
LCGQ	LC Quad 10 Gig
SM6	ST 6 Port SM
SM12	ST 12 Port SM
ST6	ST 6 Port MM
ST12	ST 12 Port MM

5	Pigtail
00	NONE
T9	900µm (Spiral Wrap)
RBN	Ribbon
DST	Distribution Cable

6	Length (Meters)
003	3 Meters

7	Tray Count
1	1
2	2
3	3
4	4
5	5
6	6

8	Splice Tray
2	2000-SSTA

9	Splice Count
24	24


### Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: <a href="mailto:engsupport@gomultilink.com">engsupport@gomultilink.com</a>	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: <a href="mailto:engsupport@gomultilink.com">engsupport@gomultilink.com</a>	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: <a href="mailto:lasupport@gomultilink.com">lasupport@gomultilink.com</a>

# Multilink®

Simply More...

Multilink, Inc  
580 Ternes Ln, Elyria, OH 44035  
Tel: (440) 366-6966 Fax: (440) 366-6802



Scan QR for website.



[facebook.com/GoMultilink1](https://facebook.com/GoMultilink1)



[twitter.com/GoMultilink](https://twitter.com/GoMultilink)



[youtube.com/GoMultilink](https://youtube.com/GoMultilink)

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 440 366 6966
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 440 366 6802
Email: <a href="mailto:engsupport@gomultilink.com">engsupport@gomultilink.com</a>	Email: <a href="mailto:engsupport@gomultilink.com">engsupport@gomultilink.com</a>	Email: <a href="mailto:lasupport@gomultilink.com">lasupport@gomultilink.com</a>

Contact Us